


Implantation suivant A
 Implantation according to A
 Ansicht nach A

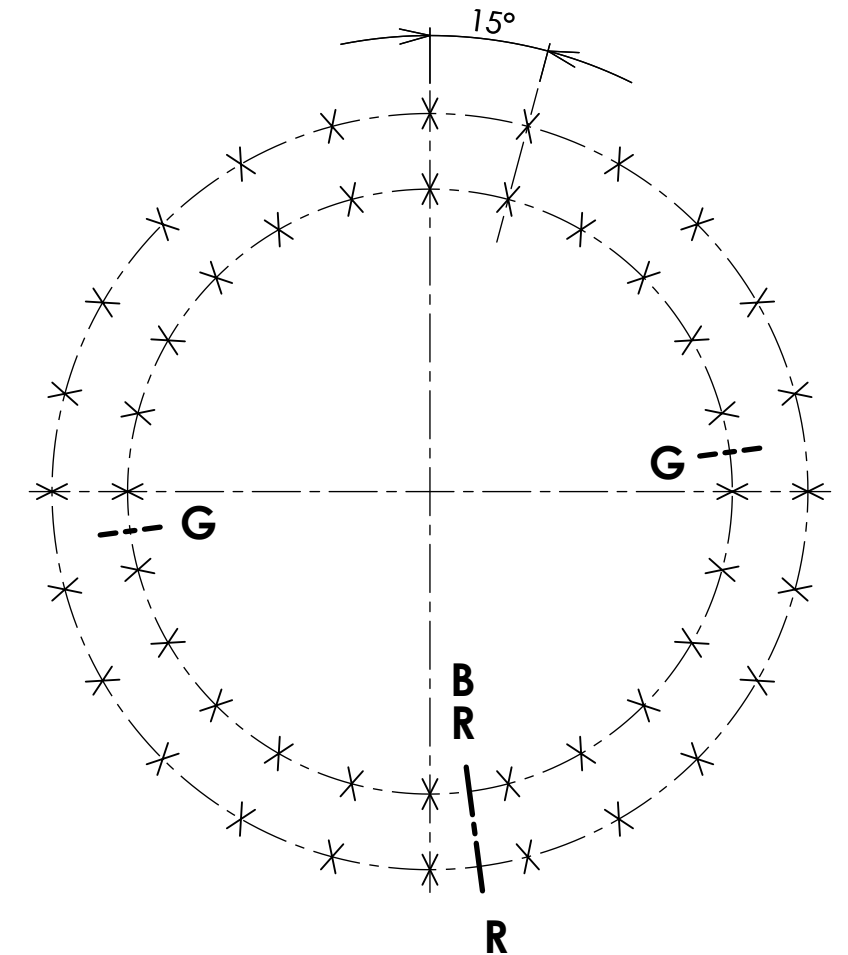

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 et ISO 8015 General tolerances according to IT-ETR-061 and ISO 8015 Allgemeine toleranzen nach IT-ETR-061 und ISO 8015				Masse estimée 103 kg Gewicht ca 103 lbs Estimated weight		N° 01-0765-01	
Module 6 Angle de pression 20° Modul - Modul Pressure angle Diametral pitch 0.50 Nbre de dents 142 Troncature 0.50 Nr. of teeth - Zahnezahl Truncature - Kopfkrzung Diamètre primitif 852 Pitch diameter - Teilkreisdurchmesser		X B.E. 24 Trous de fixation M16 O.R. equid. A.R. equis. gl. Abst.				Des. JPS		Cette couronne brevetée DUO-ROL-X est notre propriété. Ce plan ne peut être communiqué ni retansmis à des tiers sans l'autorisation écrite de ROLLIX-DEFONTAINE	
Déport 2 δm Add. mod. 2 δm - Profilverschiebung 2 δm Cote sur 17 dents 303.869 Measurement on teeth 303.689 Zahnmessweite bei Zähnen		G B.I. 24 Trous de fixation M16Lamés Ø 17.50 I.R. equid. I.R. equis. gl. Abst.				Date. 07/11/1995		Information confidential proprietary of ROLLIX-DEFONTAINE. Any person excepted is required to accept same information in confidence and agrees to make no disclosures or use there of except as authorized by ROLLIX - DEFONTAINE	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		B.E. Trous de graisseurs O.R. Grease holes A.R. Schmierborungen				Ver. J.P.S.		Diese patentierte drehverbindung DUO-ROL-X ist unser Eigentum. Diese zeichnung darf nicht ohne schriftliche genehmigung von ROLLIX-DEFONTAINE weitergegeben werden.	
Non trempée No hardened Ungehartet 0.49		Trepée Hardened Gehartet 0.64		B Position approximative du bouchon et du raccord de tremp R Filler plug and hardening connection of raceway ca Stöpfen - und heerteschlupf - position		Date. 07 / 11 / 95		Siège social : 3 rue Louis Renault B.P. 329 - 44803 ST HERBLAIN CEDEX Tel. 02.40.67.89.89 Télécopie 02.40.67.89.03	
				A 12/03/1996 Industrialisation		Ech. 1			
				Ind Date Nature - Change - Art		Visa			